


U-Profile Mounts

FT100AM15EMB / FT100AM10 / FT100AM15215 / FT100AM1519



- Package includes 2 pieces + screws
- Solid Fixation
- Easy integration
- High quality stainless steel

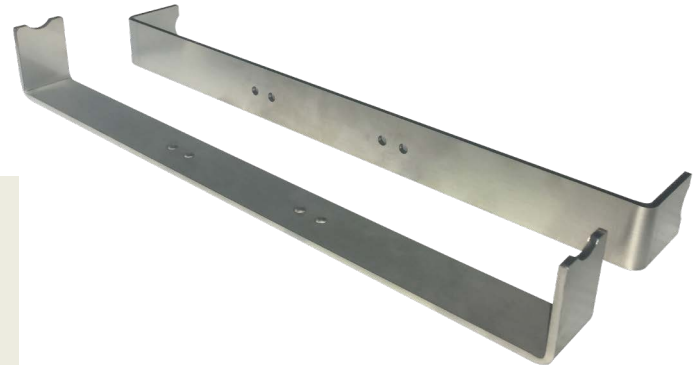

These U-Profile mounts are the basic, yet reliable mounting solution to integrate your touch device into any machine or server door. It will make sure there is a solid and clean-looking fixation.

There are several different U-profile mounts available, depending on your device.

Product name	U-Profile (10 - 21.5" CAP TM / EMB)	U-Profile (10 - 21.5" CAP TPC - N4200)	U-Profile (15 - 21.5" CAP TPC - N4200)	U-Profile (15 - 19" RES TPC)
Model No.	FT100AM15EMB	FT100AM10	FT100AM15215	FT100AM1519
Article No. DE / CN	1010500199 / 3030500459	1010500196 / 3030500366	1010501188 / 3030504334	1010500198 / 20205006673

Measurements / Material				
Length (mm)	308.00	273.00	308.00	332.00
Width (mm)	30.00	30.00	30.00	30.00
Height (mm)	24.00	44.00	39.00	41.00
Thickness (mm)	3.00	3.00	3.00	3.00
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel

Range of Application				
Capacitive TM (ABS)	10 - 21.5"	-	-	-
Embedded Cap TPC 'ARM V40' (ABS)	10 - 21.5"	-	-	-
Cap TPC 'fay-002 / Apollo Lake' (Aluminum)	-	10 - 21.5"	15 - 21.5"	-
Res TPC 'fay-002 / Apollo Lake' (Aluminum)	-	-	-	15 - 19"
Cap TPC 'Kaby Lake U' (Aluminum)	-	-	-	-



Mounting Instructions

Step 1:

Make a cut-out in the rear panel according to the specified dimensions of the touch monitor /PC rear housing.

Info: Pay attention to the additional protruding PC connections.

Required Cut-Out			
Model	Measurement	Width (mm)	Height (mm)
Capacitive TM (ABS)	10.1"	248 - 252	174 - 184
	12.1"	255 - 265	
	13.3"	270 - 280	
	15.6"	290 - 300	
15", 17", 19", 21.5"	233 - 243		
Embedded Cap TPC 'ARM V40' (ABS)		241 - 251	174 - 184
Cap TPC 'fay-002 / Apollo Lake' (Aluminum)		241 - 251	187 - 190
Res TPC 'fay-002 / Apollo Lake' (Aluminum)		305 - 315	223 - 233



Step 2:

Now insert the device into the cut-out provided for this purpose.



Step 3:

Place the U profiles on the VESA 100 M4 threaded holes provided.



Step 4:

Now screw the U-profiles to the device.

Info: Please use the enclosed 4xM4 12mm pan-head screws for this.



Corporate Headquarters

faytech AG

Bischhäuser Aue 10
37213 Witzenhausen
Germany

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 8958 0612
Germany: +49 5542 30374 10
USA: +1 646 205 3214
India: +91 11 49707436
Japan: +070 4127 5167