

15" IP65 High Brightness Touch PC

FT15N2807W2G64GIP65HB



- Comprehensive IP65 protection for applications under harsh circumstances, including water- and dustproof
- 1000+ cd/m² brightness for increased visibility even at extremely bright environmental conditions
- Extended voltage input 8~36V
- 5-Wire Resistive touch technology
- VESA 100 mounting
- 2 years guarantee

Due to its characteristics, such as vandalism-resistance and high visibility in direct sunlight, faytech's IP65 High Brightness Touch PCs are designed for applications in demanding environments, especially outdoor or environments with excessive humidity or dust.



High brightness LEDs with extremely long working time, coupled with special films and enhanced polarizers allow a perfect picture even at extremely bright environmental conditions.

The individually equipped, water- and dust-resistant, stable connectors ensure that the connectivity can withstand all harsh weather conditions.

The series are equipped with our renowned fay-002 or fay-003 mainboard, reliable RAM, SSD and WLAN modules. A preinstalled Linux Ubuntu OS makes the fanless and rugged device work directly out of the box.

The high-strength safety glass protects the models from vandalism, neither a knife nor a screwdriver would leave a scratch on the surface.

IP65 HB Touch PCs are always your best choice in the most demanding environments.



Product name	15" IP65 High Brightness Touch PC
Article code / EAN number	FT15N2807W2G64GIP65HB / 6920734015603

IP Rating	
IP65	

LCD Panel	
Screen diagonal (Inch/cm)	15/38.10
Display active screen size	30.40x22.80
Aspect ratio	4:3
Physical resolution	1024x768
External Maximum showable resolution - DP	1920x1200
Colours displayed	16.7M
Brightness (cd/m ²)	1000+
Contrast	500:1
Typical reaction time Tr/ Tf (ms)	2/6
Visual Angle horizontal/vertical (°)	160/160
Backlight / Backlight Lifetime (hours)	LED / 40,000

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	3.40
Gross weight (kg)	5.30 (incl. cartonage)
Housing material	Aluminum
Housing (cm) LxWxH	36.80 x 28.80 x 5.95
Mounting	VESA 100

Included in the Delivery
Power Supply (see Power)
Driver DVD
Short Installation Manual
Stylus
W-LAN Antenna
IP65 Cables:
1x DC-In Cable
1x 10/100/1000M Network Cable
2x Combined RS232 & USB 2.0

Expansion slots
2x Mini Card slots with PCIe and USB interface (2 x Full Height/Half height changeable)



External Connectors
1x 10/100/1000MB LAN
2x USB 2.0 / RS 232 serial
1x VGA (optional)
1x 8-36V DC-IN
2x W-LAN

PC System	
CPU	Intel® Celeron™ DualCore N2807
Chipset	Intel® E3800
Graphic GPU	Intel® HD Graphics
Audio	Realtek 887 8 -channel high definition audio codec, Audio Amplifier EUA 2012A
Memory	1x 2GB DDR3L SODimm (expandable to 4GB)
Storage	faytech Industrial 64GB SSD (SATA-DOM)
W-LAN	2x Realtek PCIe GB LAN 8111G
Driver Support	Win7/8/10; Linux; 32Bit/64Bit
Preinstalled OS	Linux Ubuntu

Touch Panel	
Touch Technology	5-Wire Resistive
Touch Connector	USB & Serial
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	10 million touches in 1 location
Surface Hardness	3H
Surface Treatment	Anti-glare

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 12V DC-Out
Working Power (W)	8~36
Power Consumption (W)	32
Stand-By Consumption (W)	<1

N2807 Internal Connectors	
1x SO-DIMM Slot, max. 4GB, DDR3L-1333 Single channel memory	
1x 12V DC power connector (2-pin)	
1x 4-pin SATA power connector	
2x S-ATA 3GB/s ports	
1x VGA pin header	
1x SIM-card-Header (connected to MiniPCIe)	
1x LVDS connector	
1x 5-pin LCD power connector	
1x S/PDIF output pin header	
1x Line-Out / Mic-In audio pin header	
1x 4-pin (2x2W) audio amplifier connector	
1x PS/2 keyboard/mouse connector (6-pin)	
1x USB 2.0 header supports additional 4x USB 2.0 ports	
2x RS232 connectors	
1x 8-bit Digital I/O interfaceconnector	
1x Chassis Fan connector	

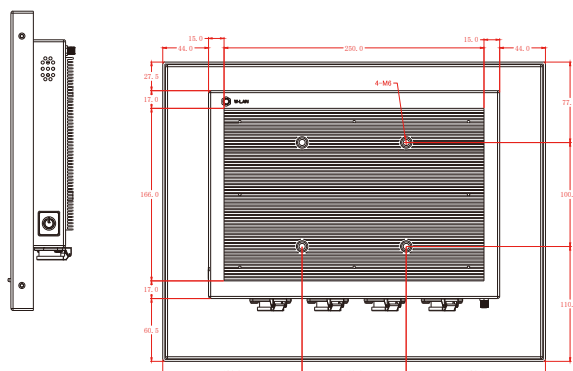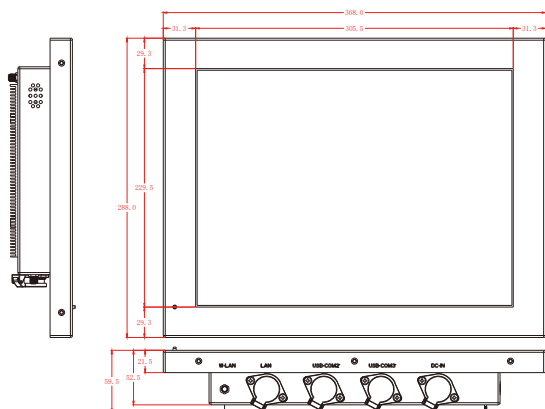

Corporate Headquarters

faytech AG
 Bischhäuser Aue 10
 37213 Witzenhausen
 Germany

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 8958 0612
 Germany: +49 5542 30374 10
 USA: +1 646 205 3214
 India: +91 11 49707436
 Japan: +070 4127 5167