

# Capacitive Touch Stylus



- Easy-to-use capacitive touch stylus
- Works with faytech's capacitive touch devices that use EETI touch controller
- Firmware downloadable from website (other firmware provided on request)
- Light and durable aluminum housing

The capacitive touch stylus is an active eGalaxPen based on capacitive sensing technology. This stylus is compatible with all of faytech's capacitive touch devices that use the EETI touch controller.

The AAAA battery life is around 3-6 months, based on an average use of 4 hours per day.

It is the perfect accessory for meeting rooms, class rooms, exhibitions and more!




<b>Product name</b>	<b>Capacitive Touch Stylus</b>
<b>Article code / EAN number</b>	<b>QTCMBEPNB</b>

Operation / Mechanical	
Operating Temperature (°C)	0 ~ 50
Storage Temperature (°C)	-30 ~ 70
Net weight (kg)	0.75
Gross weight (kg)	1.50 (incl. cartonage)
Housing material	Rubber and Aluminum
Stylus Dimension (cm) L x D	14.07 x 0.97
Pen Diameter (cm)	0.20
OS supported	Windows XP Tablet, Vista, Win 7/8/10, Linux, Android

Range of Application	
faytech's Capacitive Touch Devices from 10" to 32"	

Technical Details	
Technology	Active Capacitive Coupled
Working Frequencies (KHz)	90~250, Freq. Hopping Supported
Pressure Level	256~1024 Levels
Side Buttons	2 (Eraser, Barrel)
Active Tip Force (g)	5~25
Maximum Tip Force (g)	400
Minimum Typical Report Rate (Hz)	133
Typical Accuracy (mm)	≤ ±1
Jitter (mm)	≤ ±1

Power	
Power Supply	1x AAAA battery, 0.9V~1.8V (Replaceable, not included)
Active power consumption (mA)	0.70 - 3.00
Sleeping power consumption (mA)	0.30
Suspended power consumption (µA)	20

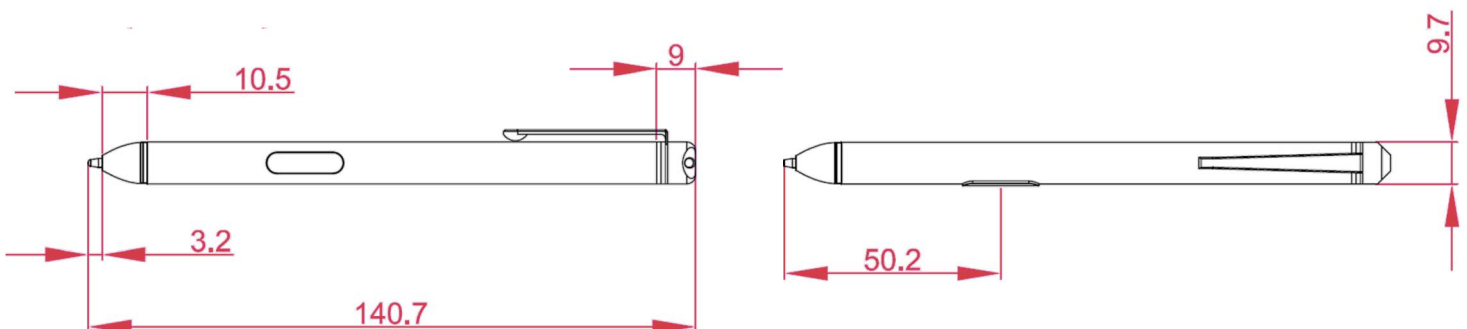

## Corporate Headquarters

**faytech AG**  
Bischhäuser Aue 10  
37213 Witzenhausen  
Germany

[support@faytech.com](mailto:support@faytech.com)  
[contact@faytech.com](mailto:contact@faytech.com)  
[www.faytech.com](http://www.faytech.com)

China: +86 755 8958 0612  
Germany: +49 5542 30374 10  
USA: +1 646 205 3214  
India: +91 11 49707436  
Japan: +070 4127 5167